







1 2 3 4 5 6 7 8 9

F
E
D
C
B
A

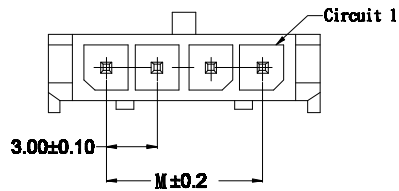

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

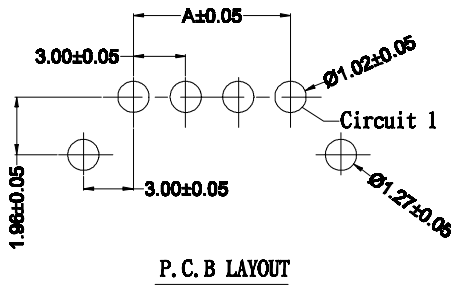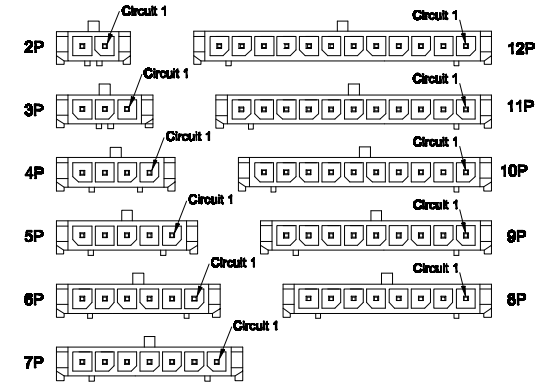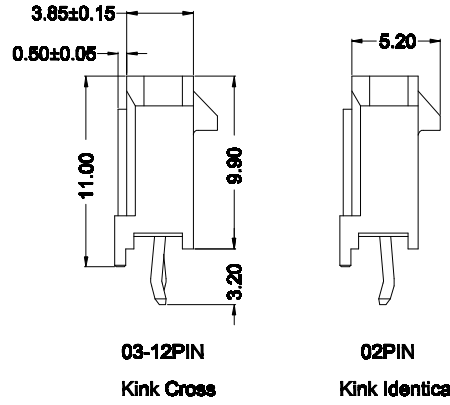

Ordering Information

G WZA108-XX XX A 802 A X B X

No. of Pins per Row 02~12 Standard Plating 01=Tin Color 1=Black Standard Packing N=PE Bag
 Selective Plating 02=Gold Flash ... Selective Packing B=Tray

| Poles | Dimensions(mm) | |
|-------|----------------|-------|
| | M | L |
| 02 | 3.00 | 9.65 |
| 03 | 6.00 | 12.65 |
| 04 | 9.00 | 15.65 |
| 05 | 12.00 | 18.65 |
| 06 | 15.00 | 21.65 |
| 07 | 18.00 | 24.65 |
| 08 | 21.00 | 27.65 |
| 09 | 24.00 | 30.65 |
| 10 | 27.00 | 33.65 |
| 11 | 30.00 | 36.65 |
| 12 | 33.00 | 39.65 |

| | | | | | | | |
|---|--------------------------------------|--|----------|-----------|-------|-----------------------------|---|
| Website: www.greenconn.com E-mail: sales@greenconn.com | 3RD.ANG PROJ. | GENERAL TOLERANCE | | DESIGNED: | DATE: | DWG. NO. GWZA108-CA802AB | TITLE. 3.00mm Crimp Style Connectors |
| | REV. A UNIT. mm SCALE. N:A | X: ±5.0' X: ±/ .X°±3.0° .X±0.30 .XX°±2.0° .XX±0.20 .XXX°±1.0° .XXX±0.10 | CHECKED: | | | | |
| | PAGE. 1/1 | APPROVED: | DATE: | | | | |

1 2 3 4 5 6 7 8 9