






F



E

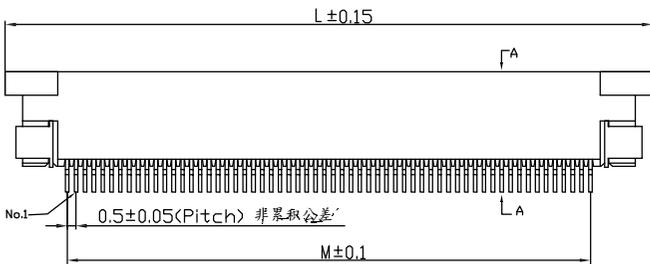


D

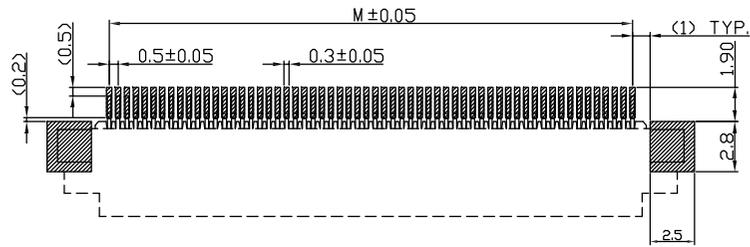

Ordering Information

C FAD102 - XX XX A 037 X X A X

No. of Pins per Row: 40,45,50,60
 Standard Plating: 02=Gold Flash
 Selective Plating: 01=Tin, 05=Gold Flash/Tin
 Housing: C=LCP, F=Nylon 46
 Color: 2=White
 Standard Packing: C=Tube, D=Tape Reel
 Selective Packing

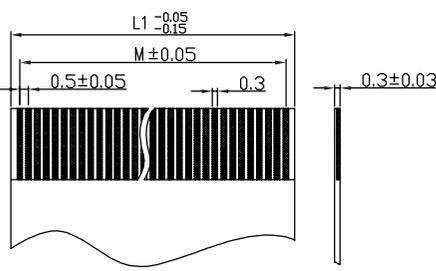

APPLICABLE FPC

NOTE:

- Material:
 - Housing: Heat Resistance Plastic (UL94V-0) Nylon 46 natural color or (UL94V-0) LCP
 - Actuator: Heat Resistance Plastic (UL94V-0) PPS brown
 - Terminal: Phosphor bronze
 - Clip: Phosphor bronze
 - Specifications
 - Current Rating : 0.5A AC/DC(max.)
 - Insulation Resistance: 500M Ω Min.
 - Dielectric Withstanding: 500V AC/DC
 - Contact Resistance: 0.03 Ω Max.
 - Operating Temperature:-25°C to +85°C
- All materials must meet GREENCONN hazardous substances control standards.

No. of PIN/ROW	Dimension Information		
	M	L1	L
40	19.50	20.60	26.50
45	22.00	23.10	29.00
50	24.50	25.60	31.50
60	29.50	30.60	36.50

A

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DWG. NO.	CFAD102-CA37XA
PART NO.	CFAD102-60XXA037XXAX

TITLE.	PITCH 0.5 mm FPC 臥貼下接
--------	--------------------------

REV. A	UNIT. mm	SCALE. 4:1	PAGE. 1/1
--------	----------	------------	-----------

F

E

D

C

B

A