

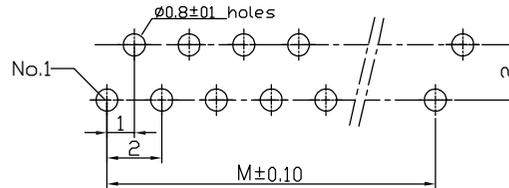
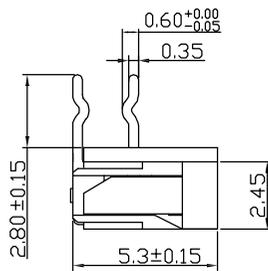
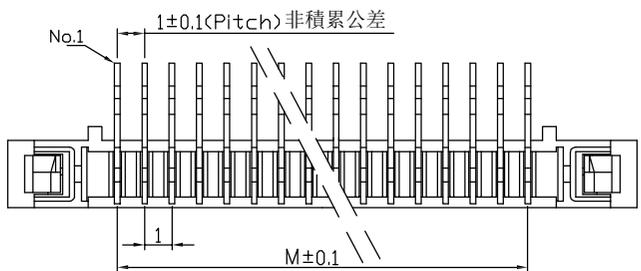


A-A

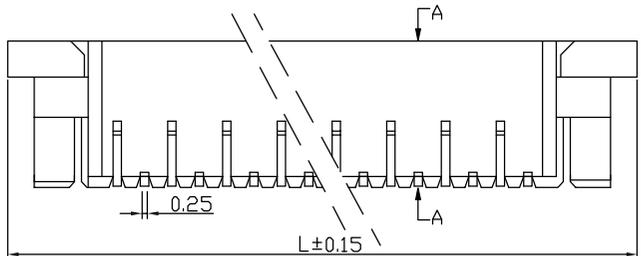

適用線路板
RECOMMENDED PCB LAYOUT

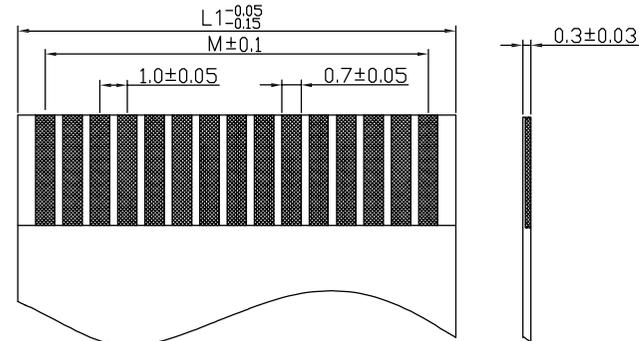

適用FPC寸法

APPLICABLE FPC

Specifications
 Voltage Rating: 50V, AC, DC
 Dielectric Withstanding Voltage: 500V, AC/minute
 Insulation Resistance: 500MΩ Min.
 Contact Resistance: 30mΩ Max.
 Temperature Range: -25°C to +85°C
 Materials
 Contact Material: Phosphor Bronze
 Actuator: UL94V-0 PPS
 Housing: High Temperature, Thermoplastic
 UL 94V-0 Nylon46 or the equivalent material
 All materials must meet Greenconn
 requirement for environment protection.

No. of Pins per Row	Dimension Information		
	M	L1	L
04	3	5.1	11
05	4	6.1	12
06	5	7.1	13
07	6	8.1	14
08	7	9.1	15
09	8	10.1	16
10	9	11.1	17
11	10	12.1	18
12	11	13.1	19
13	12	14.1	20
14	13	15.1	21
15	14	16.1	22
16	15	17.1	23
17	16	18.1	24
18	17	19.1	25
19	18	20.1	26
20	19	21.1	27
21	20	22.1	28
22	21	23.1	29
23	22	24.1	30
24	23	25.1	31
25	24	26.1	32
26	25	27.1	33
27	26	28.1	34
28	27	29.1	35
29	28	30.1	36
30	29	31.1	37
31	30	32.1	38
32	31	33.1	39
33	32	34.1	40
34	33	35.1	41
35	34	36.1	42
36	35	37.1	43
37	36	38.1	44
38	37	39.1	45
39	38	40.1	46
40	39	41.1	47

CFCB120 - XX XX A 002 F X A X

No. of Pins per Row 04~40
 Standard Plating 01=Tin
 Selective Plating 02=Gold Flash
 Color 1=Black 2=White
 Standard Packing C=Tube
 Selective Packing D=Tape Reel

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGN:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:





DWG. NO. CFCB120-CA2FA
PART NO. CFCB120-XXXXA002FXAX

TITLE:
 1.00 PITCH FPC
 RIGHT ANGLE
 ZIF TYPE CONNECTOR
 彎插下接正腳




REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1	
---------	----------	------------	-----------	--

1 2 3 4 5 6 7 8 9

F
E
D
C
B
A

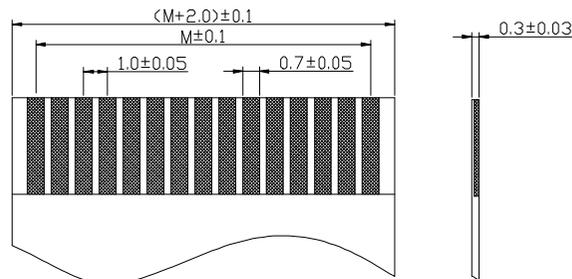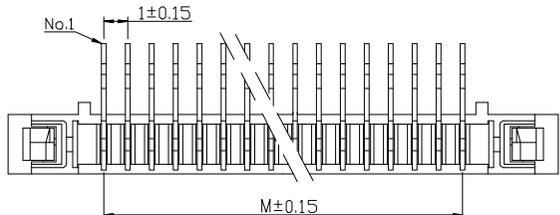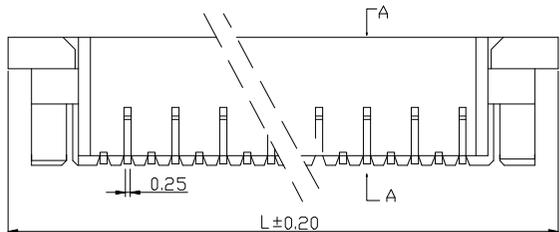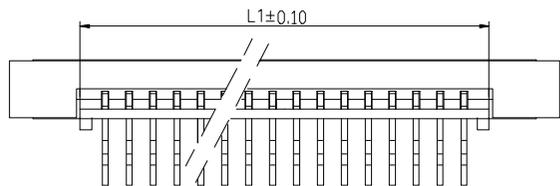

适用FPC寸法
APPLICABLE FPC

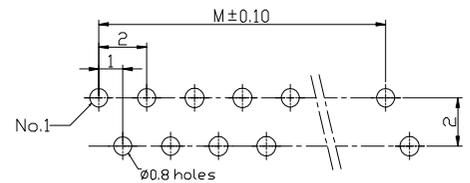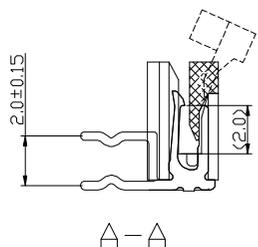


适用线路板
RECOMMENDED PCB LAYOUT

Pins	M	L1	L	Pins	M	L1	L
4	3.0	5.06	11.0	23	22.0	24.06	30.0
5	4.0	6.06	12.0	24	23.0	25.06	31.0
6	5.0	7.06	13.0	25	24.0	26.06	32.0
7	6.0	8.06	14.0	26	25.0	27.06	33.0
8	7.0	9.06	15.0	27	26.0	28.06	34.0
9	8.0	10.06	16.0	28	27.0	29.06	35.0
10	9.0	11.06	17.0	29	28.0	30.06	36.0
11	10.0	12.06	18.0	30	29.0	31.06	37.0
12	11.0	13.06	19.0	31	30.0	32.06	38.0
13	12.0	14.06	20.0	32	31.0	33.06	39.0
14	13.0	15.06	21.0	33	32.0	34.06	40.0
15	14.0	16.06	22.0	34	33.0	35.06	41.0
16	15.0	17.06	23.0	35	34.0	36.06	42.0
17	16.0	18.06	24.0	36	35.0	37.06	43.0
18	17.0	19.06	25.0	37	36.0	38.06	44.0
19	18.0	20.06	26.0	38	37.0	39.06	45.0
20	19.0	21.06	27.0	39	38.0	40.06	46.0
21	20.0	22.06	28.0	40	39.0	41.06	47.0
22	21.0	23.06	29.0				

NOTES
 MATERIAL:
 Contact Material: Phosphor Bronze
 Insulator Material: LCP UL94V-0
 PLATING SEE PART NUMBER
 RATING
 OPERATING TEMPERATURE: -25~85°C
 OPERATING VOLTAGE: 50V AC/DC
 CURRENT RATING: 1.0 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE
 500V AC/Minute
 INSULATION RESISTANCE: 500MΩ Min
 CONTACT RESISTANCE: 0.03Ω Max

Ordering Information

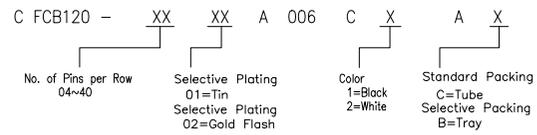

Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG PROJ.
 PAGE. 1/1

GENERAL TOLERANCE	
X'±5.0'	X.±0.35
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.10

DESIGNED: / DATE: /
 CHECKED: / DATE: /
 APPROVED: / DATE: /

DWG. NO. CFCB120-CA006
 PART NO. CFCB120-XXXXA006CXAX

TITLE. **1.0mm FPC CONN. ZIF DIP II-3.0 LOWER CONTACT**

1 2 3 4 5 6 7 8 9